

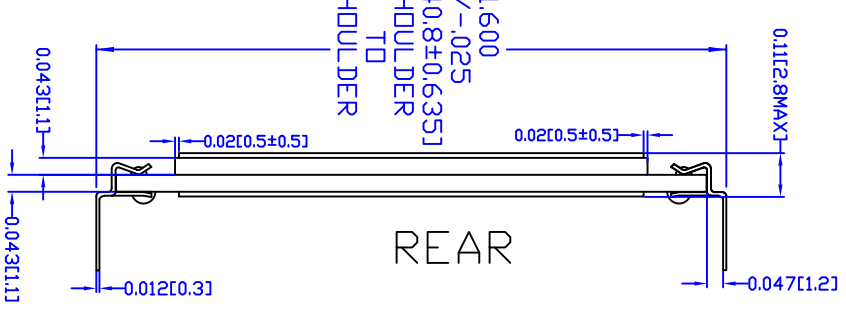
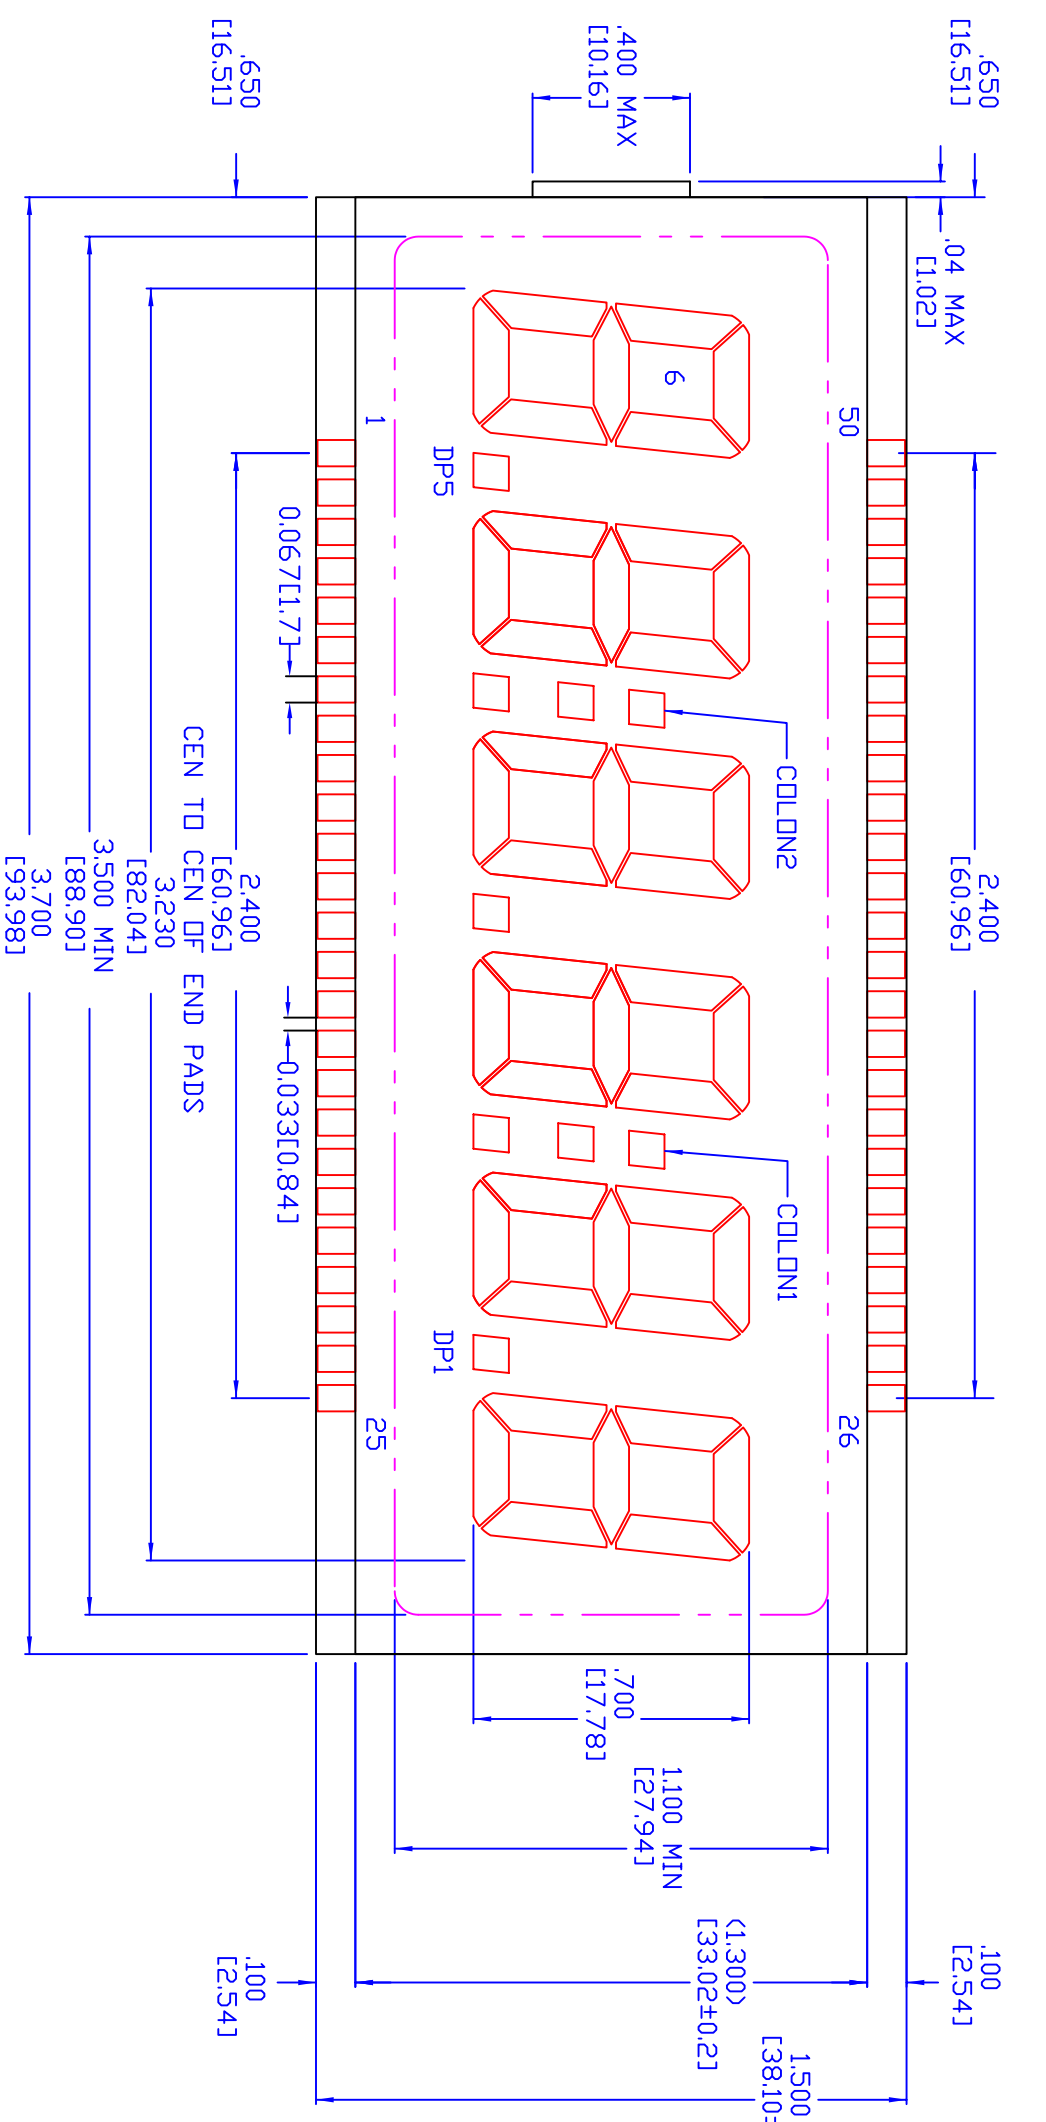


PIN	FUNCT	PIN	FUNCT
1	BP	50	6G
2	6E	49	6F
3	6D	48	6A
4	6C	47	6B
5	DP5	46	5G
6	5E	45	5F
7	5D	44	5A
8	5C	43	5B
9	DP4	42	COLDN2
10	4E	41	4G
11	4D	30	4F
12	4C	39	4A
13	DP3	38	4B
14	3E	37	3G
15	3D	36	3F
16	3C	35	3A
17	DP2	34	3B
18	2E	33	COLDN1
19	2D	32	2G
20	2C	31	2F
21	DP1	30	2A
22	1E	29	2B
23	1D	28	1G
24	1C	27	1F
25	1B	26	1A

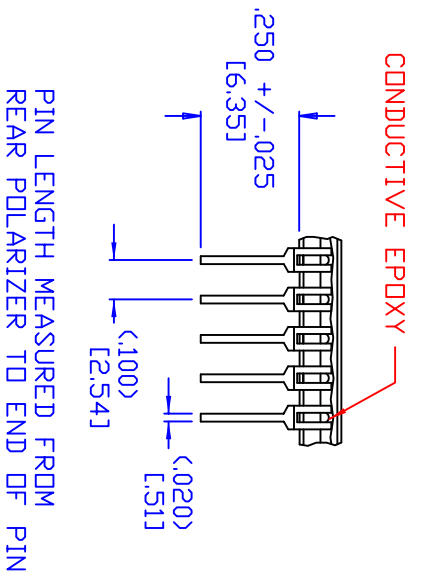

- NOTES:
1. DISPLAY TYPE: TN, TRANSPARENT, POSITIVE IMAGE (BLACK CHARACTERS - LIGHT BACKGROUND).
  2. WIDE FIELD OF VIEW.
  3. POLARIZER: OUTDOOR HIGH STABILITY (80 DEG C / 85% RH 250 HRS MIN).
  4. VIEW ANGLE: 1:30
  5. FRONT POLARIZER TO BE VERTICAL TO BE COMPATIBLE WITH POLARIZED SUNGLASSES.
  6. DRIVE METHOD: STATIC
  7. OPERATING TEMP: -40 TO +113 DEG C.
  8. ROHS COMPLIANT

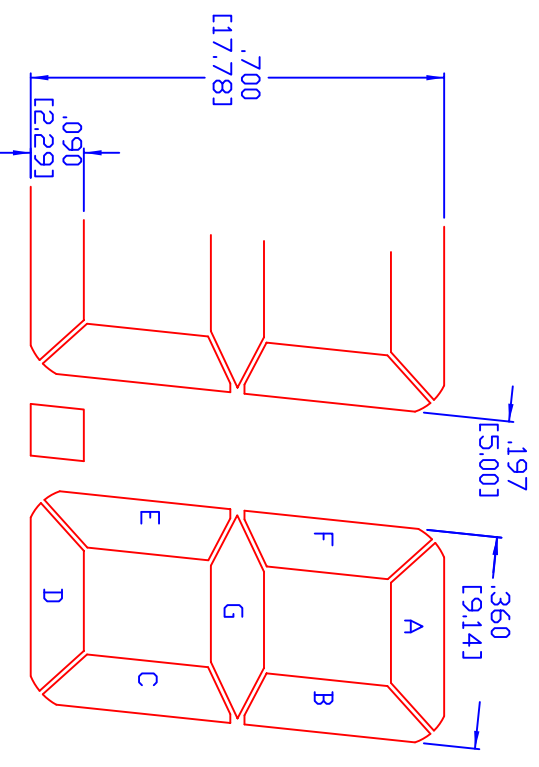

**LXD**  
LCD ORIGINAL PARTS  
www.lxdinc.com

200 ACC BLVD  
RALEIGH, NC 27617  
(919) 800-6440  
(800) 786-8720

DESCRIPTION  
**0.7 x 6 DIGITS**

PART NUMBER  
**H0070B**

INFORMATION CONTAINED HEREIN IS PROPRIETARY TO LXD, AND MAY NOT BE USED OR DISCLOSED WITHOUT THE PERMISSION OF LXD

UNLESS OTHERWISE SPECIFIED  
MM ±0.25  
INCH ±0.01

DRAWN LJO DATE 01/04/2005 SHEET 1 OF 1

REV B

2358

DO NOT SCALE