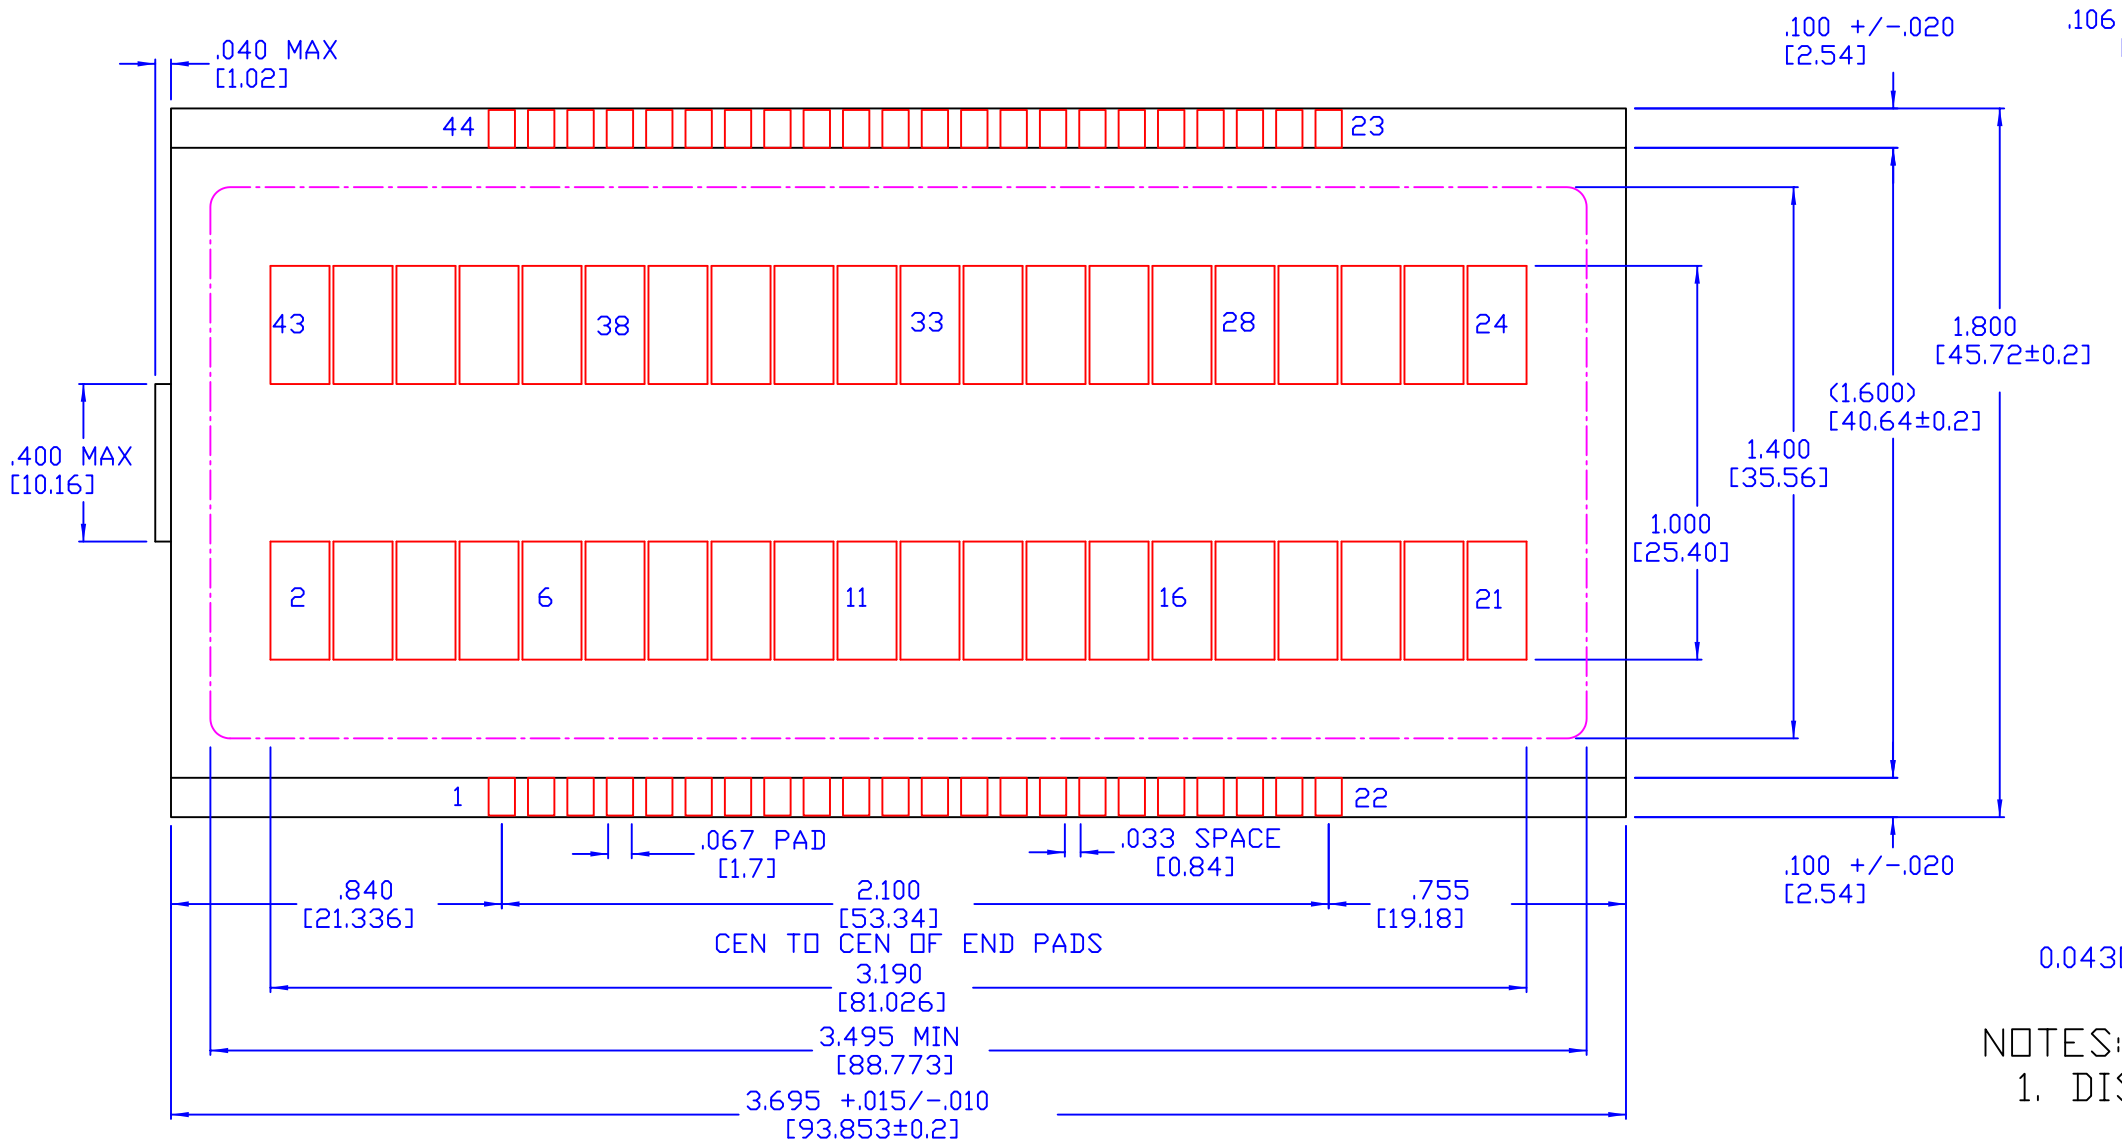

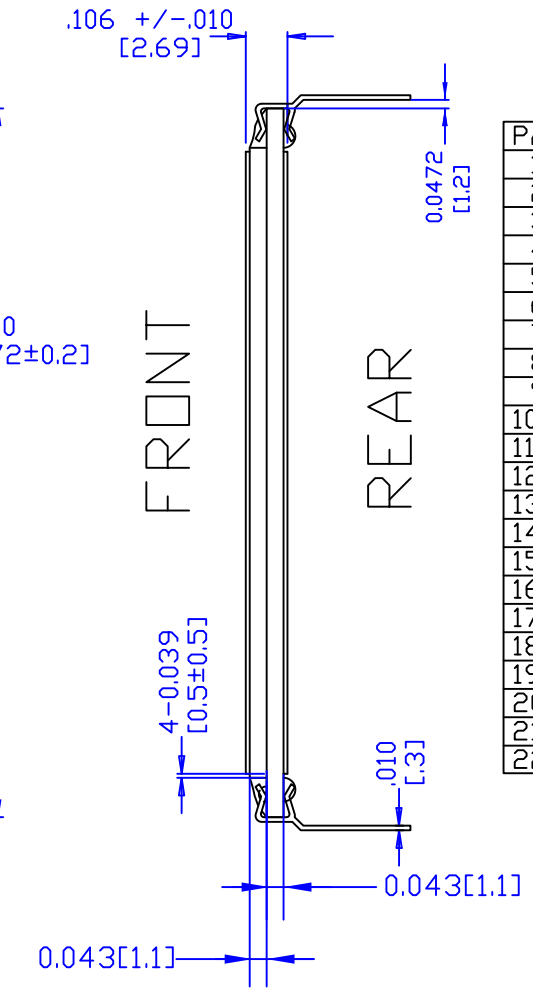

PAD#	BP1	BP2
1	BP1	---
2	BAR2	---
3	BAR3	---
4	BAR4	---
5	BAR5	---
6	BAR6	---
7	BAR7	---
8	BAR8	---
9	BAR9	---
10	BAR10	---
11	BAR11	---
12	BAR12	---
13	BAR13	---
14	BAR14	---
15	BAR15	---
16	BAR16	---
17	BAR17	---
18	BAR18	---
19	BAR19	---
20	BAR20	---
21	BAR21	---
22	BP1	---

PAD#	BP1	BP2
44	---	BP2
43	---	BAR43
42	---	BAR42
41	---	BAR41
40	---	BAR40
39	---	BAR39
38	---	BAR38
37	---	BAR37
36	---	BAR36
35	---	BAR35
34	---	BAR34
33	---	BAR33
32	---	BAR32
31	---	BAR31
30	---	BAR30
29	---	BAR29
28	---	BAR28
27	---	BAR27
26	---	BAR26
25	---	BAR25
24	---	BAR24
23	---	BP2

NOTE: BP1 AND BP2 ARE NOT INTERNALLY CONNECTED.

NOTES:

1. DISPLAY: TN, TRANSFLECTIVE, POSITIVE IMAGE (BLACK CHARACTERS - LIGHT BACKROUND).
2. OPERATING TEMP: -40 TO +113 DEG C.
3. WIDE FIELD OF VIEW.
4. POLARIZER: OUTDOOR HIGH STABILITY (80 DEG C / 85% RH 250 HRS MIN).
5. FRONT POLARIZER TO BE VERTICAL TO BE COMPATIBLE WITH POLARIZED SUNGLASSES.
6. VIEW ANGLE: 1:30
7. DRIVE METHOD: STATIC, Vop5.0V
8. RoHS COMPLIANT

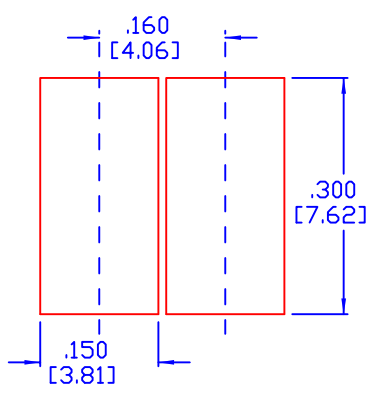

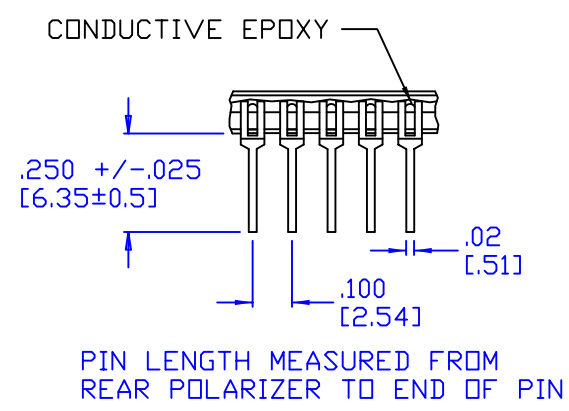

DO NOT SCALE

LXD LIQUID CRYSTAL DISPLAYS
www.lxdinc.com
7300 ACC BLVD.
RALEIGH, NC. 27617
(919) 600-6440
(800) 786-8710

INFORMATION CONTAINED HEREIN IS PROPRIETARY TO LXD, AND MAY NOT BE USED OR DISCLOSED WITHOUT THE PERMISSION OF LXD

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: MM ±0.25 INCH ±0.01

DESCRIPTION: 20 x 2 BARS

PART NUMBER: H0091B

DRAWING: 2354 | REV: A

DRAWN: LJO | DATE: 12/17/2004 | SHEET: 1 OF 2