



PIN LENGTH MEASURED FROM REAR POLARIZER TO END OF PIN

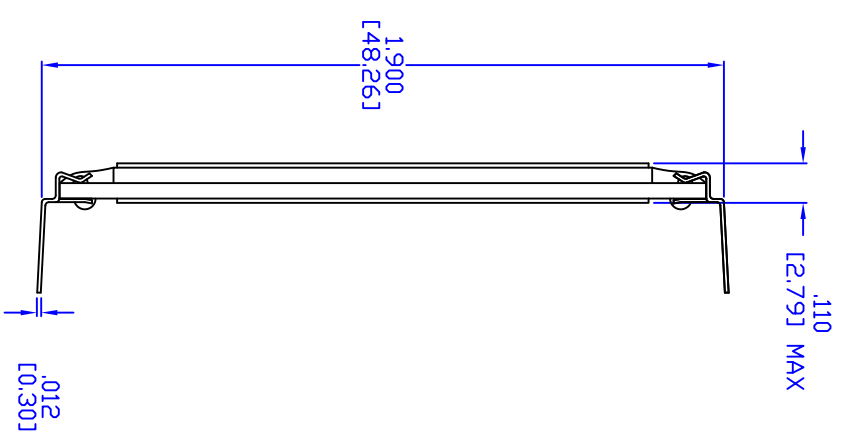

PIN	FUNCT	PIN	FUNCT
1	BP	40	BP
2	Y	39	X
3	K	38	Z
4	---	37	---
5	---	36	---
6	---	35	---
7	---	34	---
8	DP3	33	---
9	3E	32	3G
10	3D	31	3F
11	3C	30	3A
12	DP2	29	3B
13	2E	28	CDL
14	2D	27	2G
15	2C	26	2F
16	DP1	25	2A
17	1E	24	2B
18	1D	23	1G
19	1C	22	1F
20	1B	21	1A

NOTES:

1. DISPLAY: TN, REFLECTIVE, POSITIVE IMAGE (BLACK CHARACTERS - LIGHT BACKGROUND).
2. OPERATING TEMP: -40 TO +113 DEG C.
3. FRONT POLARIZER TO BE VERTICAL TO BE COMPATIBLE WITH POLARIZED SUNGLASSES.
4. VIEW ANGLE: 1:30
5. ROHS COMPLIANT.



LXD
LXD ORIGINAL DESIGN

300 ACC BLVD.
RALEIGH, NC 27617
(919) 600-0440
(800) 785-5700

www.lxdinc.com

DESCRIPTION

1.0X3.5 DIGITS

PART NUMBER

H4101A

INFORMATION CONTAINED HEREIN IS PROPRIETARY TO LXD, AND MAY NOT BE USED OR DISCLOSED WITHOUT THE PERMISSION OF LXD

UNLESS OTHERWISE SPECIFIED
DIM: INCH ±.025
TOLERANCES ARE: MMH ±.001

DRAWING: 3068
DRAWN: GBH
DATE: 09/03/2008
SHEET: 1 OF 1