
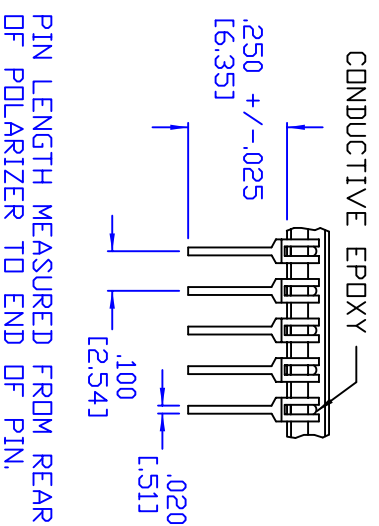


PIN#	SEG	PIN#	SEG
01	BP	40	SF
02	5G	39	5A
03	5E	38	5B
04	5D	37	L2
05	5C	36	4G
06	4E	35	4F
07	4D	34	4A
08	4C	33	4B
09	3E	32	L1
10	3D	31	3G
11	3C	30	3F
12	DP2	29	3A
13	2E	28	3B
14	2D	27	2G
15	2C	26	2F
16	DP1	25	2A
17	1E	24	2B
18	1D	23	1G
19	1C	22	1F
20	1B	21	1A

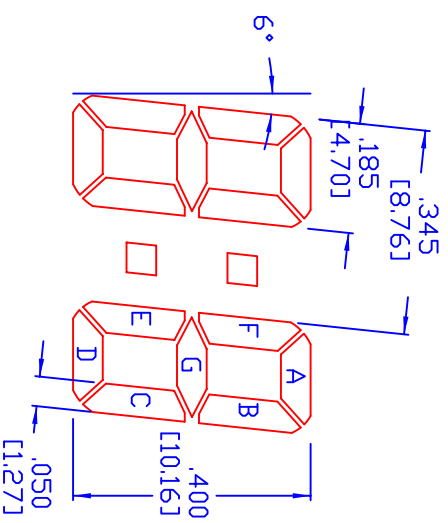

PIN LENGTH MEASURED FROM REAR DF POLARIZER TO END DF PIN.

- NOTE:
1. DISPLAY: TN, TRANSPARENT, POSITIVE IMAGE (BLACK CHARACTERS - LIGHT BACKGROUND).
 2. OPERATING TEMP: -40 TO +113 DEG C.
 3. WIDE FIELD OF VIEW.
 4. POLARIZER: OUTDOOR HIGH STABILITY (80 DEG C / 85% RH 250 HRS MIN).
 5. FRONT POLARIZER TO BE VERTICAL TO BE COMPATIBLE WITH POLARIZED SUNGLASSES.
 6. VIEW ANGLE: 1:30
 7. STATIC DRIVE
 8. ROHS COMPLIANT.

1.0x3.5 DIGITS

H4110B



INFORMATION CONTAINED HEREIN IS PROPRIETARY TO LXD, AND MAY NOT BE USED OR DISCLOSED WITHOUT THE PERMISSION OF LXD

DO NOT SCALE

DESCRIPTION	1.0x3.5 DIGITS		
PART NUMBER	H4110B		
DRAWING	2831	REV	A
DRAWN	LJO	DATE	03/27/2007
		SHEET	1 OF 1